



Sealco Commercial Vehicle Products






215 East Watkins Street Phoenix, Arizona 85004 602/253-1007 Fax 800/222-2334



Avoid lengths longer than twenty five feet.

No.	Description	No.	Description
1	480 107 000 0 Roll Stability Valve	10	#616 1/2" x 3/4" Nipple Or #6002 1/2" x 1/2" Nipple
2	110700 or 100800 Spring Brake Valve		
3	2550 Supply Filter (Optional)		
4	432 500 005 0 Control Line Filter		
5	320100 Two Way Check Valve		
6	110580 Control Line Booster Valve		
7	10200 1/2 Check Valve		
8	2000C5 Quick Release		

[1]=Mount With Exhaust Port Up

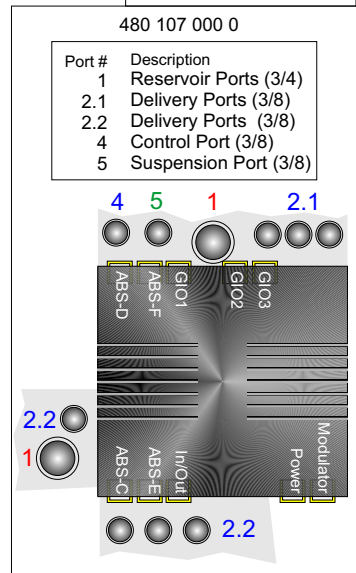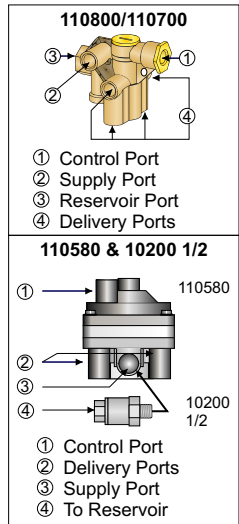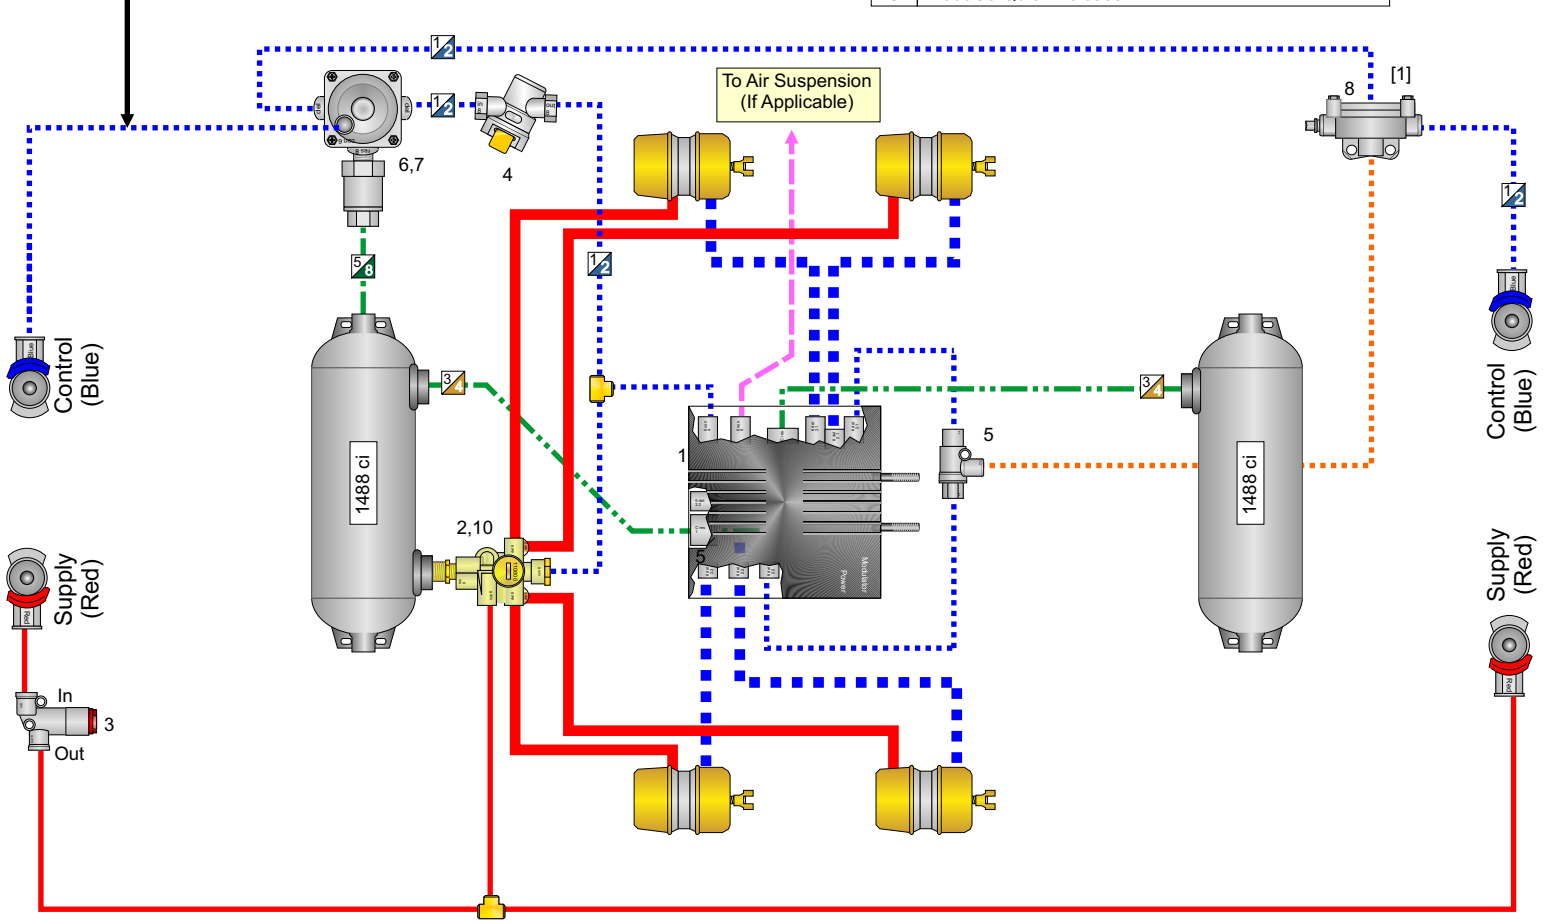

Timing Requirements For Lead Semi Trailers Are Stringent. Use Good Engineering Practices To Minimize Line Lengths And Avoid 90 Degree Fittings Where Possible

Unless otherwise noted all hose is 3/8", supply line tube 1/2" & control line tube 3/8". This design may not comply with performance requirements such as timing, grade holding or application. Compliance with these and all other applicable regulations are the responsibility of the vehicle manufacturer.